

GPL 672F2FR

6V 7.2Ah

GPL 672F2FR is a general purpose battery with 5~8 years service life under normal float charge at 25°C (77°F). As with all CSB batteries, all are rechargeable, highly efficient, maintenance free, leak proof, useable in any position.


Specification

Cells Per Unit	3
Voltage Per Unit	6.45
Capacity	7.2Ah @ 20hr-rate to 1.75V per cell @25 °C(77°F)
Weight	Approx. 1.37kg(3.02 lbs)
Maximum Discharge Current	110A(5sec)
Internal Resistance	Approx. 20mΩ
Operating Temperature Range	Discharge: -20°C~50°C(-4°F~122°F) Charge: 0°C~40°C(32°F~104°F) Storage: -20°C~40°C(-4°F~104°F)
Nominal Operating Temperature Range	25°C±3°C(77°F±5°F)
Float Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C(77°F)
Recommended Maximum Charging Current Limit	2.16A
Equalization and Cycle Service	14.4 to 15.0 VDC/unit Average at 25°C(77°F)
Self Discharge	CSB Batteries can be stored for more than 6 months at 25°C(77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Terminal	Faston Tab 187/250
Container Material	-ABS(UL94-V0 flame retardant case)



CSB-manufactured batteries are UL-recognized components under UL924 and UL1989. CSB is also certified by ISO 9001 and ISO 14001.

Dimensions

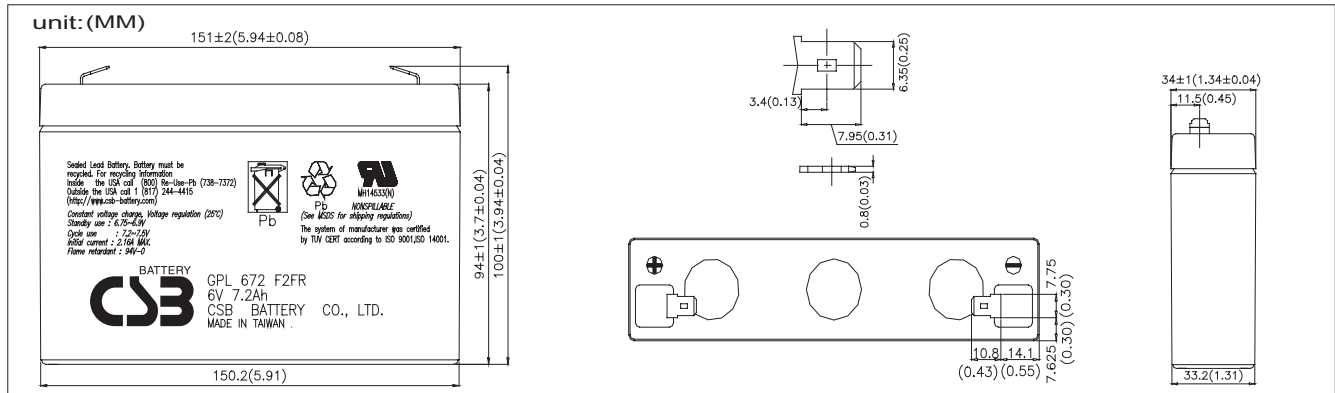

Constant Current Discharge Characteristics Unit:A (25°C , 77°F)


F.V.	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	24.1	19.2	16.7	9.05	4.61	2.74	1.87	1.53	1.29	0.901	0.739	0.374
1.67V	23.7	18.7	15.9	8.90	4.58	2.73	1.85	1.51	1.28	0.886	0.729	0.368
1.70V	23.5	18.5	15.6	8.84	4.57	2.72	1.84	1.50	1.27	0.879	0.725	0.366
1.75V	22.2	17.4	14.4	8.52	4.48	2.69	1.80	1.44	1.20	0.864	0.709	0.359
1.80V	20.9	16.2	13.2	8.19	4.39	2.66	1.75	1.38	1.13	0.849	0.693	0.351
1.83V	19.6	15.1	12.0	7.87	4.30	2.63	1.71	1.32	1.06	0.834	0.677	0.344

Constant Power Discharge Characteristics Unit:W (25°C , 77°F)


F.V.	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	129	105	92.5	51.5	27.0	16.1	11.0	9.00	7.65	5.35	4.39	2.23
1.67V	128	102	83.1	50.8	26.8	16.1	10.9	8.90	7.55	5.25	4.34	2.20
1.70V	128	102	79.0	50.5	26.8	16.1	10.9	8.85	7.50	5.20	4.32	2.18
1.75V	122	96.5	77.3	49.0	26.3	15.9	10.6	8.53	7.13	5.13	4.24	2.14
1.80V	117	91.5	75.5	47.6	25.8	15.8	10.4	8.20	6.75	5.05	4.15	2.10
1.83V	111	86.5	73.8	46.1	25.3	15.6	10.2	7.88	6.38	4.98	4.07	2.06

● All mentioned values are average values.


Trickle (or Float) Service Life

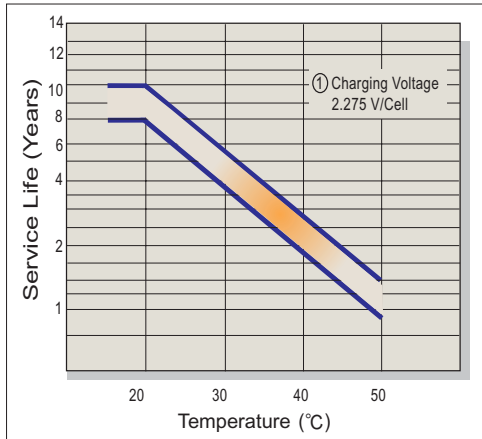


Capacity Retention Characteristic

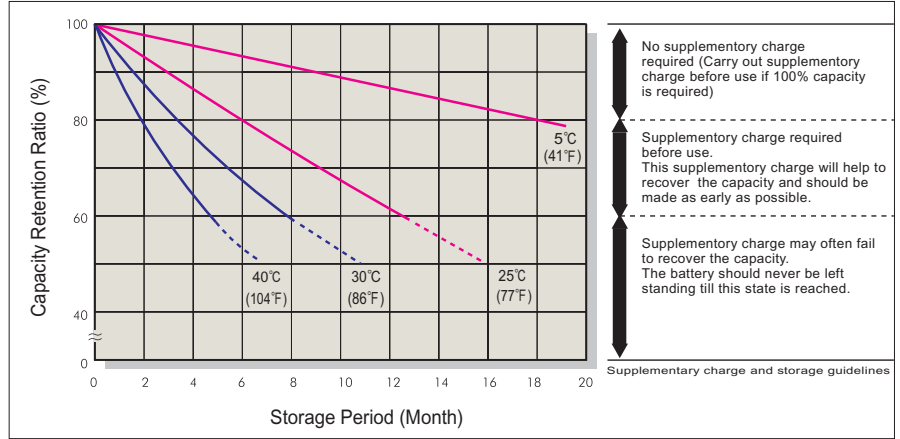


Battery Voltage and Charge Time for Standby Use

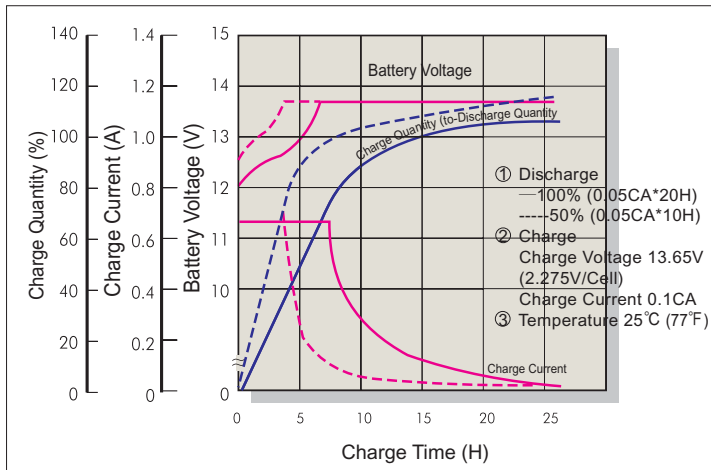


Cycle Service Life

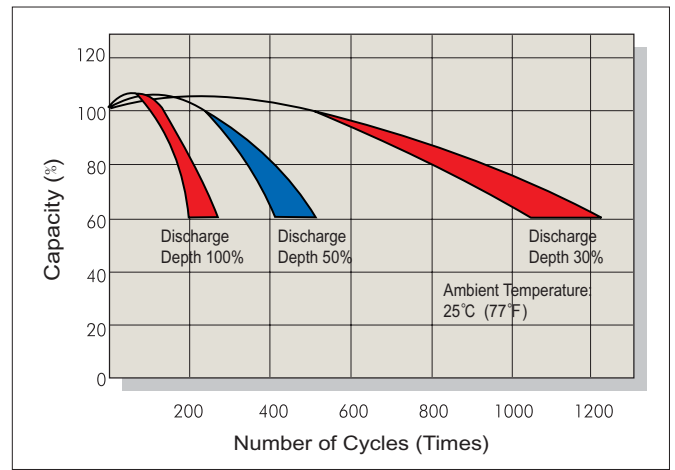

Battery Voltage and Charge Time for Cycle Use

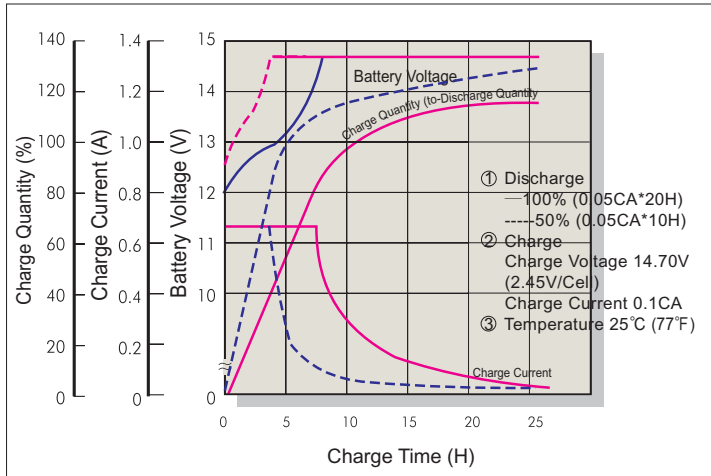

Terminal Voltage (V) and Discharge Time (25°C 77°F)

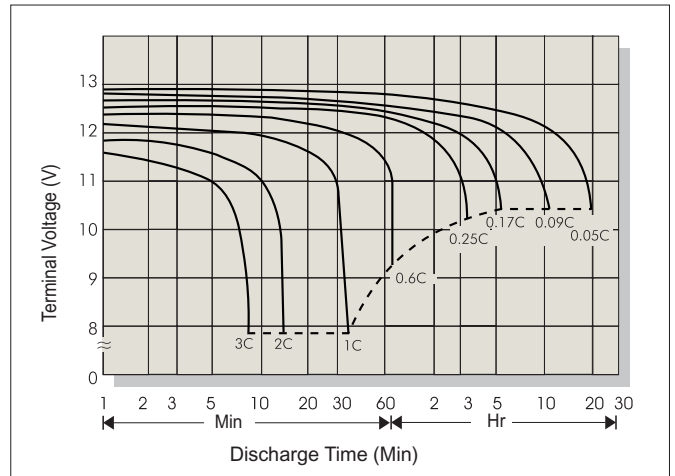

Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40~2.50	0.3C
Standby	25°C (77°F)	2.275	2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30
Discharge Current (A)	0.2C > (A)	0.2C < (A) < 0.5C	0.5C < (A) < 1.0C	(A) > 1.0C

CSB BATTERY CO., LTD.
TAIPEI HEADQUARTERS
 10FI, No. 301, Sec. 2, Tiding Blv.,
 Nei-Hu, Taipei (114), Taiwan, R.O.C.
 Tel : 886-2-87515000
 Fax: 886-2-87516161
 E-mail: service@csb-battery.com.tw
 URL: www.csb-battery.com

CSB BATTERY TECHNOLOGIES, INC.,
NORTH AMERICA HEADQUARTERS
 Tel: 1-619-710-0188
 Fax: 1-619-710-0189
FORT WORTH SALES OFFICE
 Tel: 1-817-244-7777 / (800)3-CSB-USA
 Fax: 1-817-244-4445
 E-mail: csb@csb-battery.com

CSB BATTERY LOGISTICS
(SHANGHAI), CO., LTD.
 Tel: 86-21-5046-1622, 5046-0833
 Fax: 86-21-5046-3314
BEIJING OFFICE
 Tel: 86-10-6597-8060, 6597-8070
 Fax: 86-10-6597-8050
 E-mail: chinasl@csb-battery.com

CSB BATTERY (SINGAPORE) PTE., LTD.
 No. 2, Shenton Way, #15-02 SGX Centre 1,
 Singapore 068804
 Tel: 65-6534-3277
 Fax: 65-6534-3077
 E-mail: sales@csb-battery.com.sg